

ZKTeco®

Security Anytime Anywhere.

F6

Fingerprint standalone access control and RS485 FP reader

Introduction


F6 is an innovative biometric fingerprint reader for access control applications, offering unparalleled performance using an advanced algorithm for reliability, precision and excellent matching speed. The device offers the flexibility to be installed standalone or with any third party panel that supports 26-bit wiegand. Also it can works as FP reader using RS485 communication to transfer the template to ZK inBIO controller or standalone device.

Specification

Fingerprint Capacity	500
Transaction Capacity	30,000
Communication	RS485, SD card
Access control interfacefor	3rd party electric lock, door sensor, exit button, alarm, Door bell
Wiegand interface	Output
Optional function	ID, Mifare card
Power supply	12V DC



Configuration

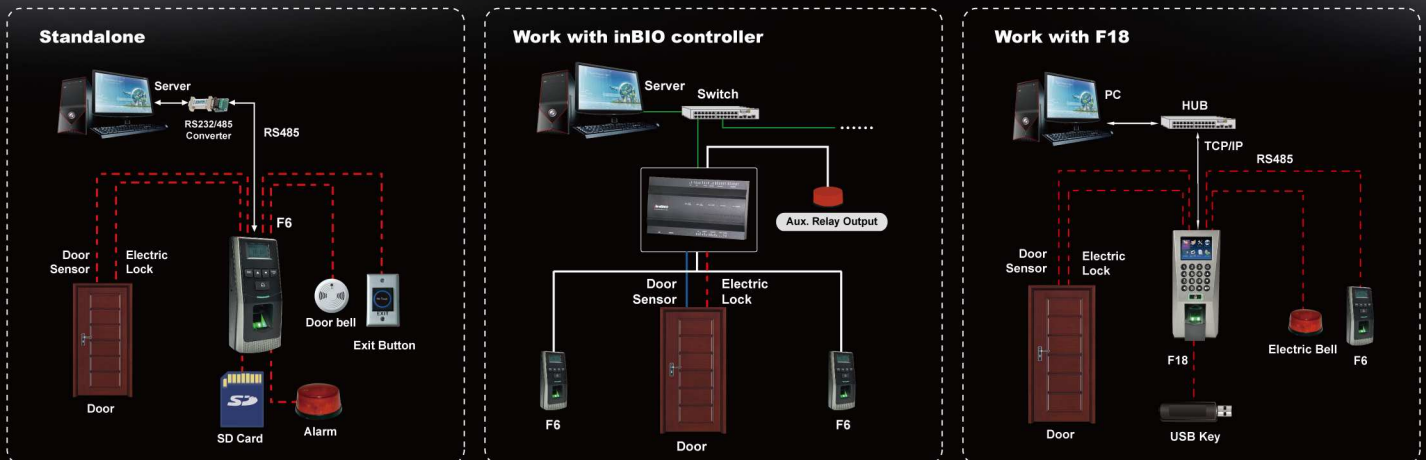

ZKTeco Inc.

ZK Mansion,WuHe Rd,Gangtou,Bantian,Buji Town,Longgang District,Shenzhen China 518129

Tel:86-755-8960 2345/46/47/48 Fax:86-755-8960 2675 www.zkteco.com

Copyright ©2012, ZKTeco, Inc. All rights reserved.

ZKTeco may, at any time and without notice, make changes or improvements to the products and services offered and/or cease producing or commercializing them.

